SC METROMAT SRL

Compartimentul Comercial: 505600 - Sacele - Piata Libertatii nr.2 - tel/fax: 0268 275 212; 0268 276 807 e-mail: sales@metromat.ro - comert@metromat.ro

SAUTER Dinamometre mecanice, cu arc, seria 289, max.10N.

Spring balances SAUTER 287/289




KERN 289



KERN 287

NEW

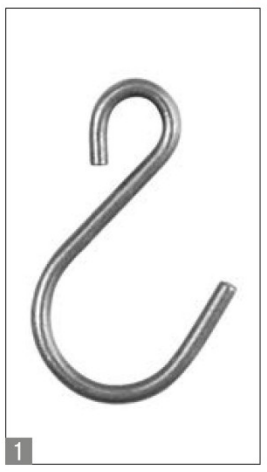

1



2



3

Mechanical weight and force measurement with quality spring for long service life

Features

- **The very best price/performance ratio thanks to the transparent plastic housing,** ideal for schools and educational institutions
- **Newton scale:** The KERN 289 range can display the results in Newtons instead of in grammes, specifically for measuring tensile forces
- **High quality:**
  - zero-play spring bearing with highly-precise adjustment
  - fatigue-proof stainless steel spring
- Abrasion-resistant, colour precision scale with high resolution
- Thanks to the rotating inner tube, the scale is always easy to read
- The bracket which is delivered as standard can easily be swapped for another suspension device, so that the system can be individually adapted to the items being weighed
- You will find a wide range of further spring balances with gramme division or Newton division for tension and pressure measurements and specific accessories at www.sauter.eu and page 26 onwards

Technical data

- Accuracy of: ± 0,3 % of the load
- Tare range: 20 % of [Max]

Accessories

- 1 Bracket for spring balances of 10-1000 g/ 0,1-10 N, KERN 287-A01
- 2 Hook for spring balances 10-1000 g/ 0,1-10 N, KERN 287-A02
- 3 Bird weighing cone for spring balances (50 – 500 g) KERN 281-891

STANDARD: 1 DAY; 2 YEARS WARRANTY

OPTION: ISO +4 DAYS

Model SAUTER	Division N	Measuring range N	Load support		Option ISO Calibration Certificate ISO KERN	
289-100	0,01	1	hook		961-161	
289-102	0,05	5	hook		961-161	
289-104	0,1	10	hook		961-161	

Model SAUTER	Division g	Weighing range g	Load support		Option ISO Calibration Certificate ISO KERN	
287-100	0,1	10	clip		961-100	
287-102	0,2	20	clip		961-100	
287-104	0,5	50	clip		961-100	
287-106	1	100	clip		961-100	
287-108	5	500	clip		961-100	
287-110	10	1000	clip		961-100	

Fotografia are caracter informativ. Aceasta fisa a fost realizata sub rezerva modificarilor de ordin tehnic ulterioare sau a erorilor de editare.

Products and specifications are subject to change without prior notice.