SC METROMAT SRL

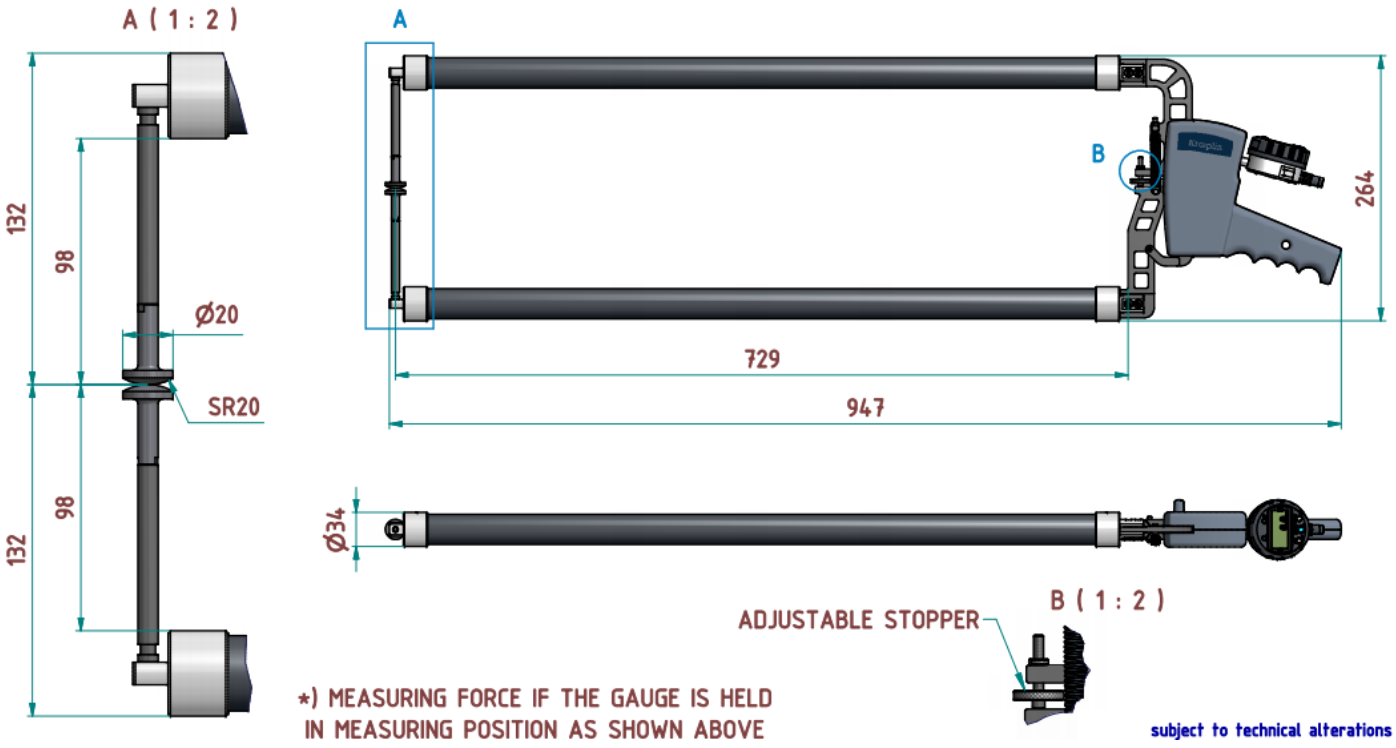
Compartimentul Comercial: 505600 - Sacele - Piata Libertatii nr.2 - tel/fax: 0268 275 212; 0268 276 807
e-mail: sales@metromat.ro - comert@metromat.ro

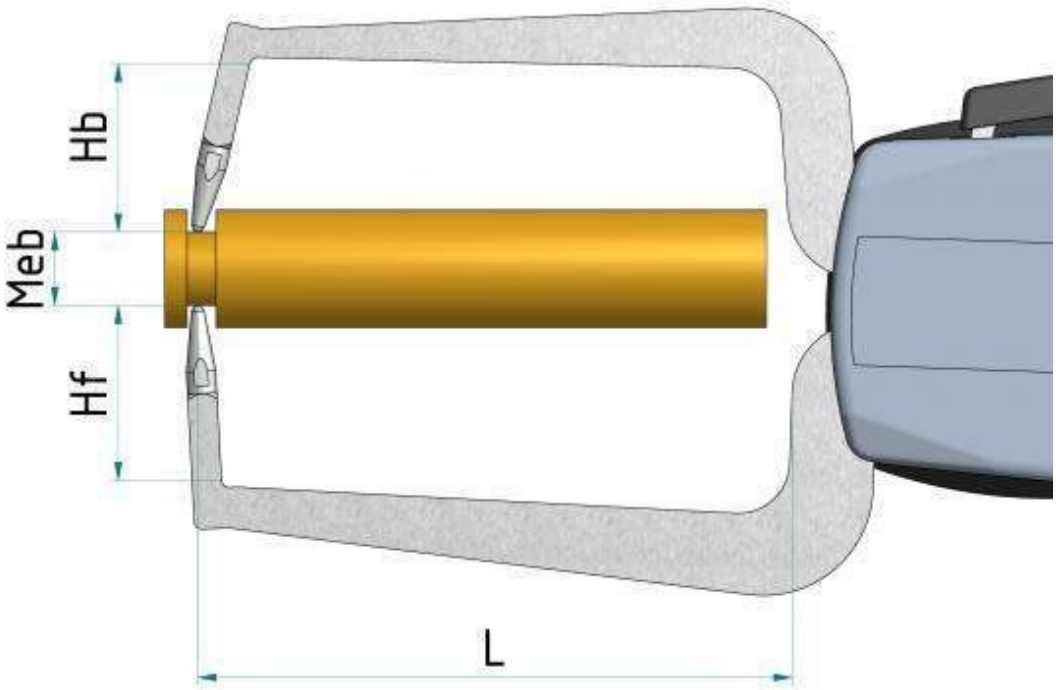
Kroeplin

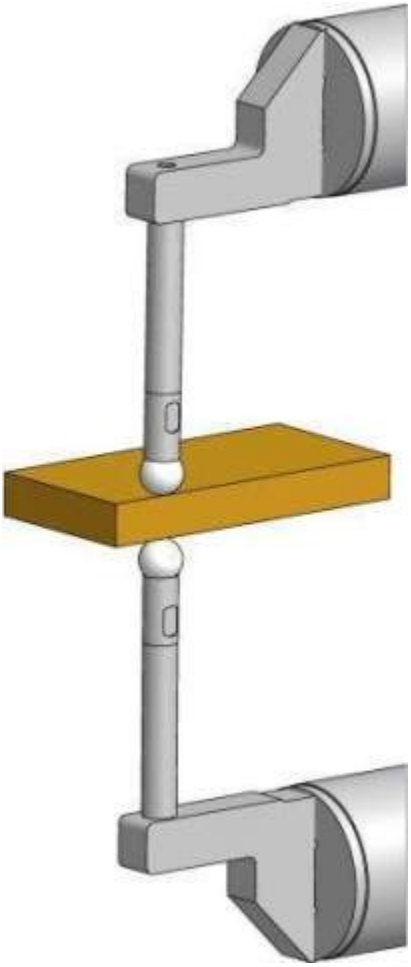
Aparat de masurat grosime 0 ... 200mm, C16200

Properties of the product

Type	C16200
Display MM / INCH	MM
Application	External measurement
Measuring span Mes	200 mm
Measuring range Meb	0 - 200 mm
Range of indication Azb	0 - 201 mm
Scale interval Skw	0,2 mm
Max. permissible errors G	0,4 mm
Repeatability limit r	0,2 mm
Measuring force min.	0,8 N
Measuring force max.	1,5 N
Type of measuring contact movable	Hemisphere SR 20 mm
Type of measuring contact fixed	Hemisphere SR 20 mm
Measuring contact thickness max.	Ø 20 mm
Measuring depth max. L	729 mm
Weight	1300 g
Reference temperature	20 °C
Operating temperature	10 - 30 °C
Storage temperature	-10 - 50 °C
Protection class	Not available


A (1 : 2)
A
B
132
98
Ø20
SR20
98
132
264
729
947
Ø34
B (1 : 2)
ADJUSTABLE STOPPER
*) MEASURING FORCE IF THE GAUGE IS HELD
IN MEASURING POSITION AS SHOWN ABOVE
subject to technical alterations


Hb
Meb
Hf
L



NOTA: Aceasta fisa a fost realizata sub rezerva modificarilor ulterioare de ordin tehnic sau a erorilor de editare.

Fotografia are caracter informativ.

NOTE: Products and specifications are subject to change without prior notice .Pictures may differ from original.